



Shenzhen XingKeChuang Technology Co., Ltd.



XKC-Y28-NO/NC/RS485 ( D≥11MM  
RS485 .

1.XKC-Y28-NO/NC/RS485 ( D≥11MM

- 2.
- 3.
- 4.
- 5.

5V,12V,24V

6. 20mm


7. 5V,12V,24V

IC




Shenzhen XingKeChuang Technology



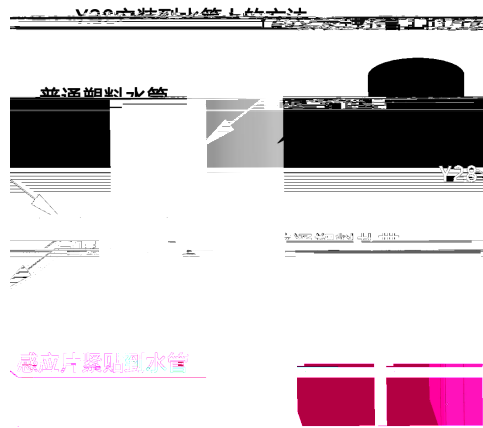

PC/PVC

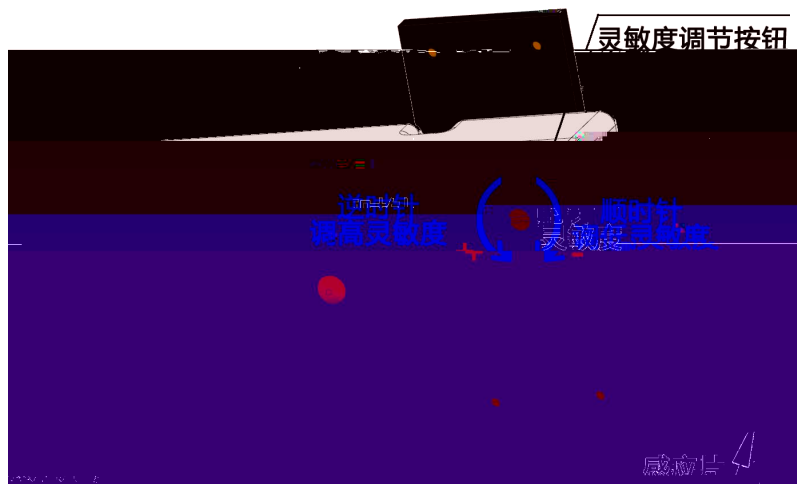

## KKC-Y28-NC输出原理及接线方法



|    |     |     |    |     |
|----|-----|-----|----|-----|
| 1. | NC  | VCC | NC |     |
|    |     |     | NC | VCC |
| 2. | GND |     | NC |     |
|    |     |     | NC | GND |

## NO接点原理及接线方法



连接PLC或MCU接线方法

NPN输入类型：COM端接GND

PNP输入类型：COM端接VCC



NPN信号输出：  
连接指示灯的接线方法

PNP信号输出：  
连接继电器的接线方法

|    |     |     |    |       |
|----|-----|-----|----|-------|
| 1. | NO  | VCC | NO | , VCC |
| 2. | GND |     | NO |       |
|    |     |     | NO | GND   |
|    |     |     | NO |       |





Shenzhen XingKeChuang Technology Co., Ltd.



|     |    |    |    |    |    |     |     |
|-----|----|----|----|----|----|-----|-----|
| 1   | 2  | 3  | 4  | 5  | 6  | 7   | 8   |
| ADR |    |    |    |    |    | CRC | CRC |
| FF  | 06 | 00 | 04 | 00 | 02 | 5C  | 14  |

|   |      |       |          |
|---|------|-------|----------|
| 1 | 0000 | 00 00 |          |
| 2 |      |       | OutPut   |
|   | 0001 | 00 00 | OutPut = |

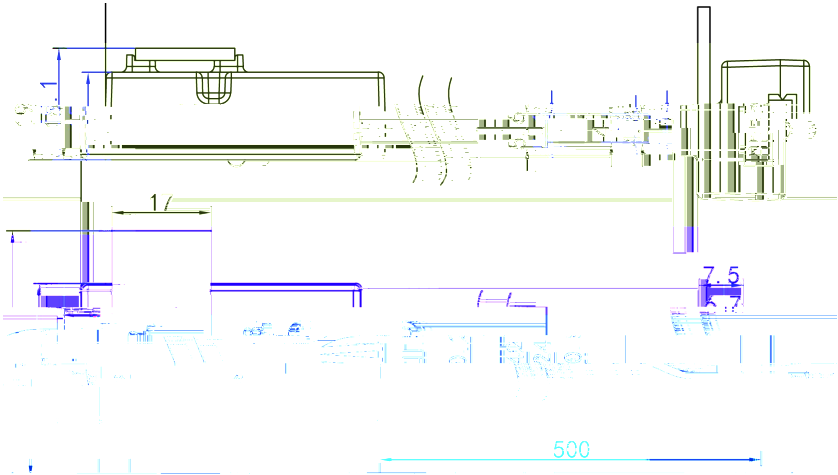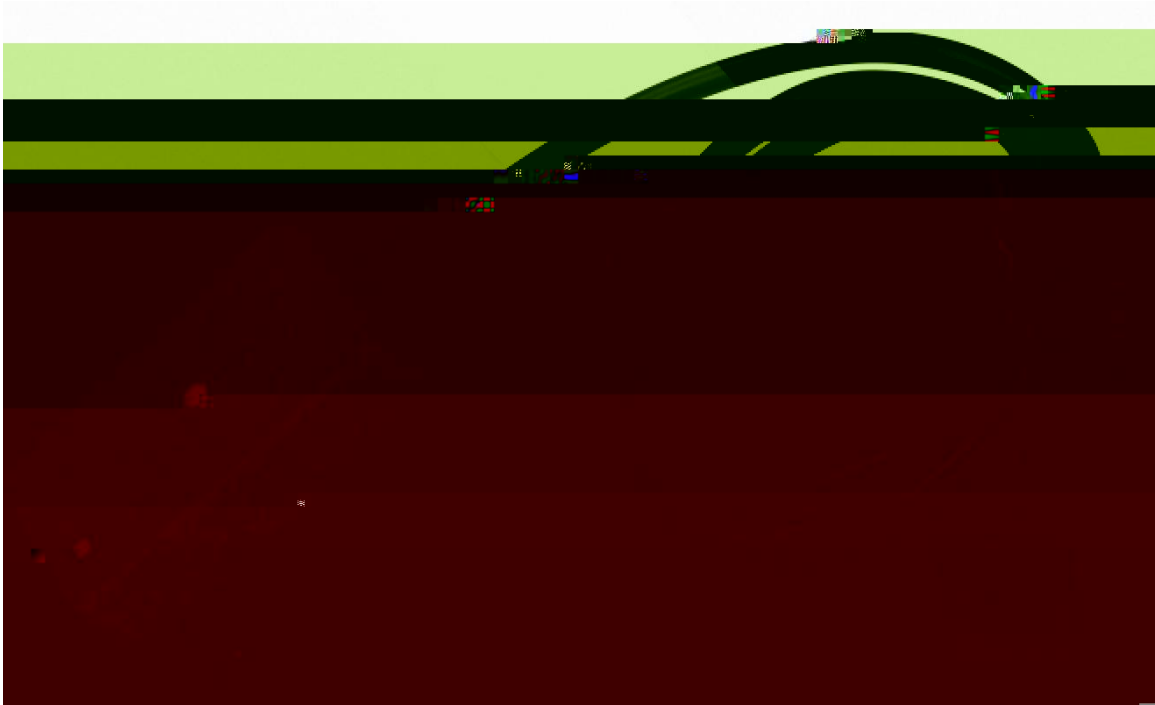

I<sup>1</sup> t

:





( )

( )

, ( ) , ( )

( )

( )

/ : , 12 DOA ,  
7

( )

1. ( )

2. ,

3.

4.

,

5. /

m" W